


■ 紧凑型气缸 Compact cylinder

ADVU系列 ADVU Series



■ 订货型号 Order Code

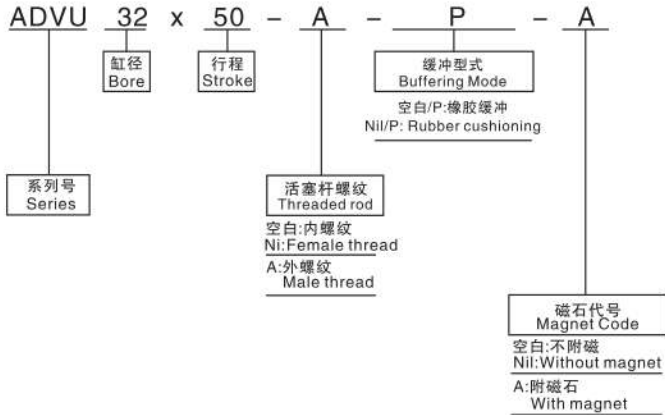

■ 技术参数 Technical Specification

缸径(mm) Bore Size	12	16	20	25	32	40	50	63	80	100
动作型式Acting Mode	复动型 Double Acting									
工作介质Working Media	空气(经40 μ m过滤的洁净空气)Cleaned Air									
使用压力 Working Pressure	0.1~0.9Mpa(kgf/cm ²)									
保证耐压力Proof Pressure	1.35Mpa(13.5kgf/cm ²)									
工作温度 Working Temperature	-5~70℃									
缓冲型式Buffering Mode	垫缓冲 Rubber Cushion									
接管口径Port Size	M5				G1/8				G1/4	
本体材质 Body Material	铝合金Aluminum Alloy									


■ 感应开关的选择 Selection Of Sensor Switch

缸径 Bore Size	12	16	20	25	32	40	50	63	80	100
型式 Mode	CS1-M									
感应开关 Sensor Switch	CS1-M									

■ 气缸行程 Stroke Of Cylinder

缸径 Bore Size (mm)	标准行程(mm) Standard Stroke(mm)										最大行程 Max. Stroke (mm)	容许行程 Allowable Stroke (mm)
12	5	10	15	20	25	30	35	40	45	50	50	60
16	5	10	15	20	25	30	35	40	45	50	50	60
20	5	10	15	20	25	30	35	40	45	50	80	90
25	5	10	15	20	25	30	35	40	45	50	80	90
32	5	10	15	20	25	30	35	40	45	50	130	150
40	5	10	15	20	25	30	35	40	45	50	130	150
50	5	10	15	20	25	30	35	40	45	50	130	150
63	5	10	15	20	25	30	35	40	45	50	130	150
80	5	10	15	20	25	30	35	40	45	50	130	150
100	5	10	15	20	25	30	35	40	45	50	130	150

■ 外型尺寸 Dimension

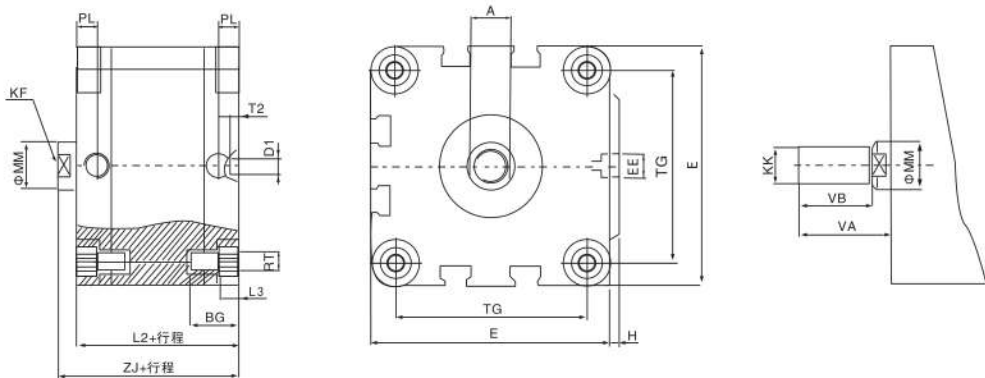

代号 Code	A	BG	D1	E	EE	H	L2	L3	MM	PL	RT	T2	TG	VA	VB	ZJ	KK	KF
缸径 Bore Size																		
12	5	18.5	6	29	M5	1	38	3	6	8	M4	4	18	20.5	16	42.5	M6	M3
16	7	18.5	6	29	M5	1	38	3	8	8	M4	4	18	24.5	20	42.5	M8	M4
20	9	18.5	6	36	M5	1.5	39	4	10	8	M5	4	22	26.5	22	43.5	M10×1.25	M5
25	9	18.5	6	40	M5	1.5	41	4	10	8	M5	4	26	27.5	22	46.5	M10×1.25	M5
32	10	21.5	6	50	G1/8	2	44.5	5	12	8	M6	4	32	28	22	50.5	M10×1.25	M6
40	10	21.5	6	60	G1/8	2.5	46	5	12	8	M6	4	42	28.5	22	52.5	M10×1.25	M6
50	13	22	6	68	G1/8	3	48.5	6	16	8	M8	4	50	31.5	24	56	M12×1.25	M8
63	13	24.5	8	87	G1/8	4	50	8	16	8	M10	4	62	31.5	24	57.5	M12×1.25	M8
80	17	27.5	8	107	G1/8	4	56	8	20	8.5	M10	4	82	40	32	64	M16×1.5	M10
100	22	32.5	8	128	G1/4	5	66.5	8	25	10.5	M10	4	103	50	40	76.5	M20×1.5	M12