


■ 薄型气缸Thin Cylinder

CQ2系列 CQ2 Series




■ 订货型号 Order Code

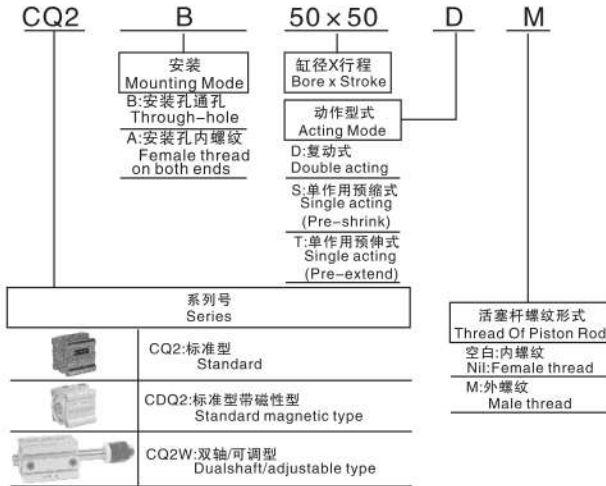


■ 外型尺寸 Dimension

Φ12-Φ25

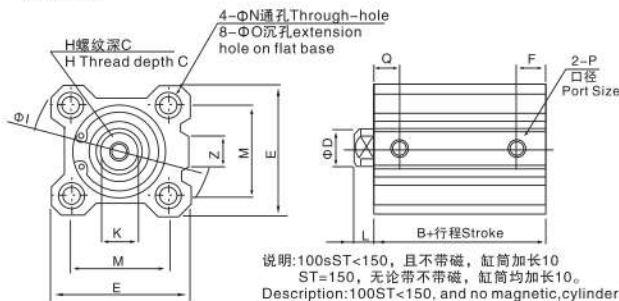

缸径 Bore Size (mm)	B 附磁 Magnet type	标准 Standard type	D	E	F	H	C	I	J	K	L	M	N	O	P	Q	W	Z
12	27	17	6	25	5	M3×0.5	6	32	-	5	3.5	15.5	3.5	6.5深Depth3.5	M5×0.8	7.5	-	-
16	28.5	18.5	8	29	5	M4×0.7	8	38	-	6	3.5	20	3.5	6.5深Depth3.5	M5×0.8	8	-	10
20	29.5	19.5	10	36	5.5	M5×0.8	10	47	-	8	4.5	25.5	5.5	9深Depth7	M5×0.8	9	-	10
25	32.5	22.5	12	40	5.5	M6×1.0	12	52	-	10	5	28	5.5	9深Depth7	M5×0.8	11	-	10
32	33	23	16	45	7.5	M8×1.25	13	-	4.5	14	7	34	5.5	9深Depth7	G1/8	10.5	49.5	14
40	39.5	29.5	16	52	8	M8×1.25	13	-	5	14	7	40	5.5	9深Depth7	G1/8	11	57	15
50	40.5	30.5	20	64	10.5	M10×1.5	15	-	7	17	8	50	6.6	11深Depth8	G1/4	10.5	71	19
63	46	36	20	77	10.5	M10×1.5	15	-	7	17	8	60	9	14深Depth10.5	G1/4	15	84	19
80	53.5	43.5	25	98	13	M16×2.0	20	-	6	22	10	77	11	17.5深Depth13.5	G3/8	13	104	25
100	63	53	30	117	17	M20×2.5	27	-	6.5	27	12	94	11	17.5深Depth13.5	G3/8	17	123.5	25

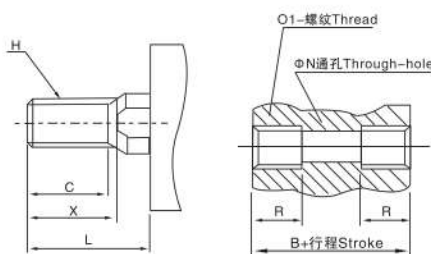

■ 技术参数 Technical Specification

缸径(mm) Bore Size	12	16	20	25	32	40	50	63	80	100
动作型式Acting Mode	复动型 Double Acting									
工作介质Working Media	空气(经40μm过滤的洁净空气)Cleaned Air									
使用压力 Working Pressure	0.1~0.9Mpa(kgf/cm)									
保证耐压力Proof Pressure	1.35Mpa(13.5kgf/cm ²)									
工作温度 Working Temperature	-5~70℃									
缓冲型式Buffering Mode	垫缓冲 Rubber Cushion									
接管口径Port Size	M5			1/8			1/4		3/8	
本体材质 Body Material	铝合金Aluminum Alloy									

■ 感应开关的选择 Selection Of Sensor Switch

缸径 Bore Size	12	16	20	25	32	40	50	63	80	100
感应开关Sensor Switch	D-A93									

■ 气缸行程 Stroke Of Cylinder

缸径 Bore Size (mm)	标准行程(mm) Standard Stroke(mm)										最大行程 Max. Stroke (mm)	容许行程 Allowable Stroke (mm)
12	5	10	15	20	25	30	-	-	-	-	50	60
16	5	10	15	20	25	30	-	-	-	-	50	60
20	5	10	15	20	25	30	35	40	45	50	80	90
25	5	10	15	20	25	30	35	40	45	50	80	90
32	5	10	15	20	25	30	35	40	45	50	130	150
40	5	10	15	20	25	30	35	40	45	50	130	150
50	5	10	15	20	25	30	35	40	45	50	130	150
63	5	10	15	20	25	30	35	40	45	50	130	150
80	5	10	15	20	25	30	35	40	45	50	130	150
100	5	10	15	20	25	30	35	40	45	50	130	150