


■ 不锈钢气源 Stainless steel gas source

YR系列 YR Series



■ 符号Symbol




■ 订货型号Order Code

YR	-	200	-	02	N	H	C
系列代号 Series		规格代号 Specification code		接管口径 Port Size	配管口螺纹 Thread thread for pipe fittings	压力 Stress	工作温度 Stress
		200		02: G1/4	空白Nil: G	空白Nil: 0~1.6Mpa	空白Nil: -5~100°
		400		03: G3/8	N:NPT	N: 0~4Mpa	N: -40~50°
		600		04: G1/2	R:RC		
				06: G3/4			
				10: G1			

■ 技术参数Technical Specification

型号 Model	YR200-02	YR400-03	YR400-04	YR600-06	YR600-10
接管口径 Port Size	G1/4	G3/8	G1/2	G3/4	G1
工作介质 Working medium	洁净的空气 Clean air				
最大流量 Maximum flow	1850L/min	2250L/min	2520L/min	9000L/min	9400L/min
重量 Weight	1150g	1350g	1300g	3300g	3200g
最高使用压力 Maximum use pressure	2Mpa				
保证耐压力 Ensure stress tolerance	3Mpa				
环境温度 Ambient temperature	-5° ~70°				
过滤孔径 Filter aperture	5 μm(标准配备standard), 40 μm(选购optional)				
本体材质 Body material	不锈钢Stainless steel SUS316				
附属配件 Accessories	压力表Pressure gauge(0~1.6Mpa)、塞头、固定架组Plug Head, fixed frame group				
选购配件 Choose accessories	压力表 Pressure gauge(0~1Mpa/0~4Mpa)				

■ 外型尺寸Dimension

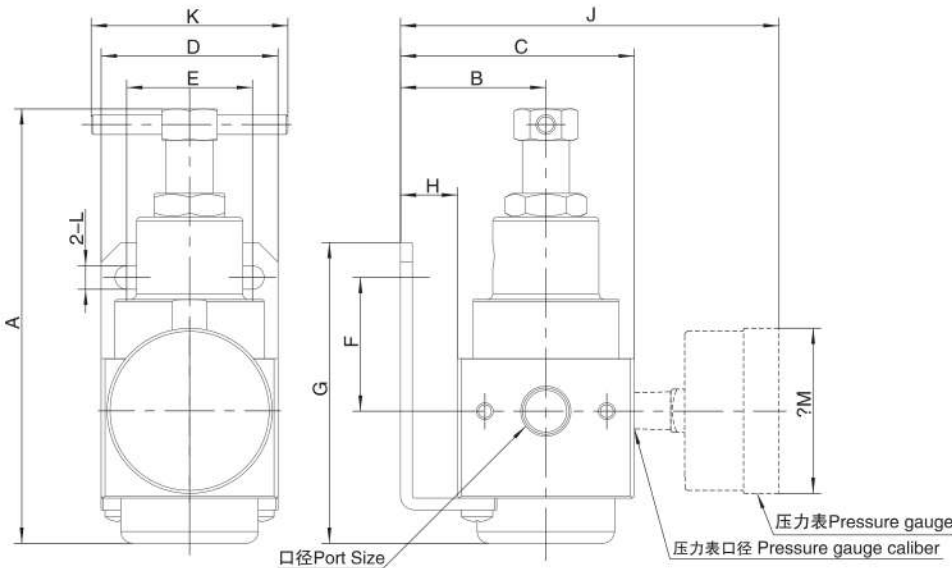

型号Model	口径Port Size	A	B	C	D	E	F	G	H	J	K	2-L	ØM
YL-200	G1/4	110.5	37	59.5	45	32	33.6	76	14.5	96.3	50	6	42
YL-400	G3/8,G1/2	157	42	71	58	36	45	105	13	120	80	9	58
YL-600	G3/4,G1	176	45	82.5	75	50	67	131	7.5	132.5	90	9	58