


■ 不锈钢气源 Stainless steel gas source

YW系列 YW Series



■ 符号Symbol




■ 订货型号Order Code

YW	200	02	N	H	U	D	C
系列代号 Series	规格代号 Specification code	接管口径 Port Size	配管口螺牙 Thread thread for pipe fittings	压力 Stress	滤芯精度 Filter accuracy	排水方式 Drain Mode	工作温度 Stress
	200	02: G1/4	空白Nil: G	空白Nil: 0~1.6Mpa	空白Nil: 5 μ m	空白Nil: 半自动排水 Semi-automatic drainage	空白Nil: -5~100°
	400	03: G3/8	N: NPT	N: 0~4Mpa	U: 40 μ m	M: 手动排水 Manual Type	N: -40~50°
	600	04: G1/2	R: RC			D: 自动排水 Automatic Type	
		06: G3/4					
		10: G1					

■ 技术参数Technical Specification

型 号 Model		YW200-02	YW400-03	YW400-04	YW600-06	YW600-10
接管口径 Port Size		G1/4	G3/8	G1/2	G3/4	G1
压力表口径 Pressure gauge caliber		G1/8	G1/4	G1/4	G1/4	G1/4
工作介质 Working medium		洁净的空气 Clean air				
最大流量 Maximum flow		1850L/min	2220L/min	2500L/min	7600L/min	8000L/min
重量 Weight		1340g	1960g	1940g	7520g	7500g
水杯容量 Water glass capacity		105cc	110cc		200cc	
保证耐压力 Ensure stress tolerance		3Mpa				
环境温度 Ambient temperature		-10° ~70°				
调压范围 Voltage Range		0~2Mpa				
过滤孔径 Filter aperture		5 μ m(标准配备standard), 40 μ m(选购optional)				
附属配件 Accessories		压力表Pressure gauge(0~1.6Mpa)、塞头、固定架组Plug Head, fixed frame group				
选购配件 Choose accessories		压力表 Pressure gauge(0~1Mpa/0~4Mpa)				
主要配件材质 Material of main parts	本体材质 Body material	不锈钢Stainless steel SUS316				
	杯子材质 Cup material	不锈钢Stainless steel SUS316				
	滤芯材质 Filter material	不锈钢Stainless steel SUS316				

■ 外型尺寸Dimension

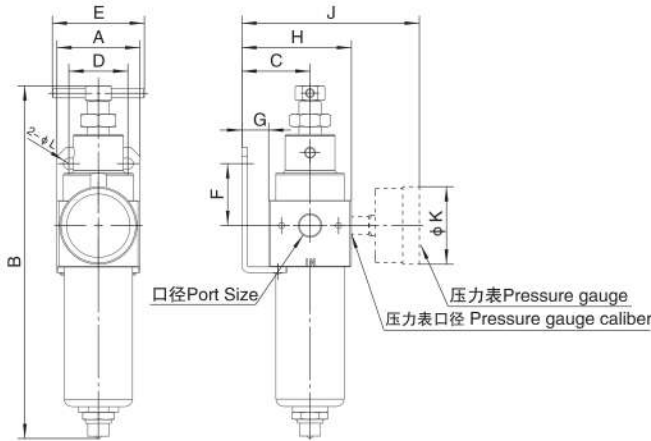

型号Model	口径Port Size	A	B	C	D	E	F	G	H	J	ØK	2-ØL
YW-200	G1/4	45	190	37	32	50	33.6	14.5	59.5	96.3	42	6
YW-400	G3/8, G1/2	58	246.7	42	36	80	45	13	71	120	58	9
YW-600	G3/4, G1	75	288	45	50	90	67	7.5	82.5	132.5	58	9