
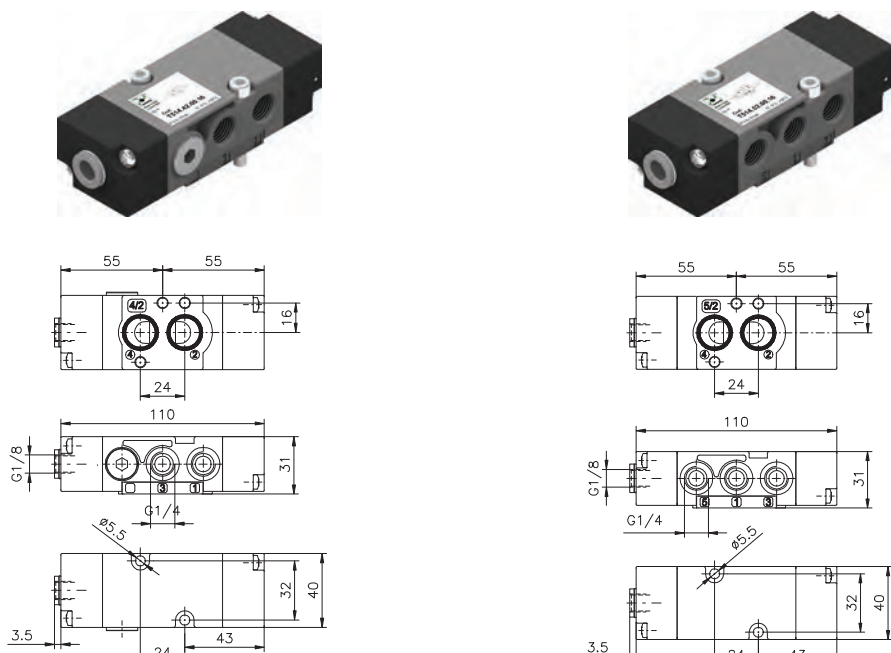





Pneumatic - Differential / Pneumatic - Pneumatic / Pneumatic - Spring

4/2
5/2

Ordering code						
T514.t .00.f						
t	TYPE					
	42 = 4 ways 52 = 5 ways					
f	FUNCTION					
	16 = Pneumatic - Differential					
	18 = Pneumatic - Pneumatic					
	19 = Pneumatic - Spring					
						
Weight gr. 140 Minimum pilot pressure 2,5 bar						
		Maximum fixing torque for fittings 9 N/m				
Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)
	Filtered and lubricated air	10 bar	Min. -5°C	Max. +50°C	1100 Nl/min	mm 8
						Working ports size
						G 1/4"

Solenoid - Solenoid

4/2
5/2

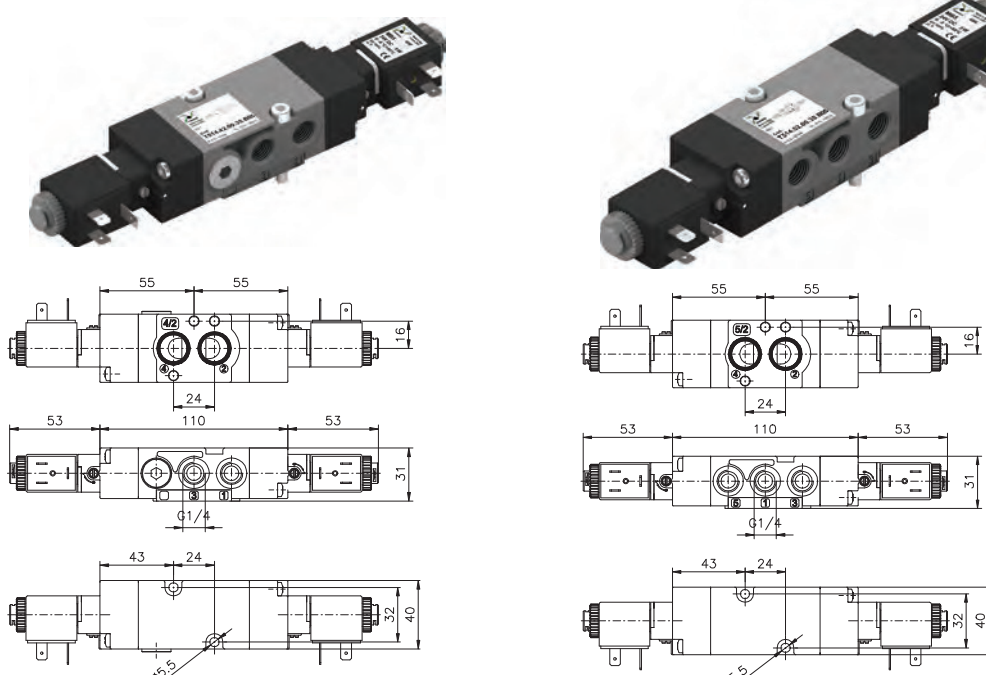Ordering code						
T514.t .00.35.v						
t	TYPE					
	42 = 4 ways 52 = 5 ways					
v	VOLTAGE					
	B04 = 12 VDC					
	B05 = 24 VDC					
	B09 = 24 VDC (2W)					
	B56 = 24V (50-60 Hz)					
	B57 = 110V (50-60 Hz)					
	B58 = 220V (50-60 Hz)					
						
Weight gr. 250 Minimum pilot pressure 2,5 bar Maximum fixing torque for fittings 9 N/m						
Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)
	Filtered and lubricated air	10 bar	Min. -5°C	Max. +50°C	1100 Nl/min	mm 8
						Working ports size
						G 1/4"











Solenoid - Differential / Solenoid - Spring

4/2
5/2

Ordering code

T514.t .00.f .v

t	TYPE
	42 = 4 ways 52 = 5 ways
f	FUNCTION
	36 = Solenoid - Differential 39 = Solenoid - Spring
v	VOLTAGE
	B04 = 12 VDC
	B05 = 24 VDC
	B09 = 24 VDC (2W)
	B56 = 24V (50-60 Hz)
	B57 = 110V (50-60 Hz) B58 = 220V (50-60 Hz)

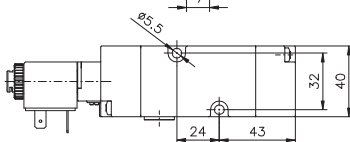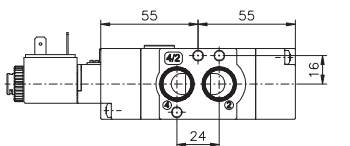

Weight gr. 200
Minimum pilot pressure 2,5 bar
Maximum fixing torque for fittings 9 N/m

Operational characteristic



Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Working ports size
Filtered and lubricated air	10 bar	Min. -5°C Max. +50°C	1100 Nl/min	mm 8	G 1/4"

Universal kit

Ordering code

T514.92.00.f .v

f	FUNCTION
	16 = Pneumatic - Differential 18 = Pneumatic - Pneumatic 19 = Pneumatic - Spring
	35 = Solenoid - Solenoid 36 = Solenoid - Differential 39 = Solenoid - Spring
	VOLTAGE
	B04 = 12 VDC B05 = 24 VDC B09 = 24 VDC (2W) B56 = 24V (50-60 Hz) B57 = 110V (50-60 Hz) B58 = 220V (50-60 Hz)



Weight gr. 170
Minimum pilot pressure 2,5 bar
Maximum fixing torque for fittings 9 N/m



To change a 5/2 valve into a 4/2:
Simply replace the bottom plate with the one included in the universal kit (cod. T514.92....) and by plugging port 5

Operational characteristic

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Working ports size
Filtered and lubricated air	10 bar	Min. -5°C Max. +50°C	1100 Nl/min	mm 8	G 1/4"