

■ 不锈钢气源 Stainless steel gas source

YL系列 YL Series



■ 符号Symbol




■ 订货型号Order Code

YL	-	200	-	02		N		H
系列代号 Series		规格代号 Specification code		接管口径 Port Size		配管口螺纹 Thread thread for pipe fittings		压力 Stress
		200		02: G1/4		空白Nil: G		空白Nil: 0~1.6Mpa
		400		03: G3/8		N:NPT		N: 0~4Mpa
		600		04: G1/2		R:RC		
				06: G3/4				
				10: G1				

■ 技术参数Technical Specification

型号 Model	YL200-02	YL400-03	YL400-04	YL600-06	YL600-10
接管口径 Port Size	G1/4	G3/8	G1/2	G3/4	G1
工作介质 Working medium	洁净的空气 Clean air				
最大流量 Maximum flow	2500L/min	2525L/min	4100L/min	13200L/min	13200L/min
重量 Weight	1150g	1700g	1680g	3300g	3280g
油杯容量 Oil Cup capacity	125cc	130cc		200cc	
最高使用压力 Maximum use pressure	0.8Mpa				
保证耐压力 Ensure stress tolerance	3Mpa				
环境温度 Ambient temperature	-5° ~100°				
推荐用油 Recommended oil	透平一号油 Turbine No. 1 oil(ISO VG32)				
附属配件 Accessories	固定架组 Fixed frame group				
主要配件材质 Material of main parts	不锈钢Stainless steel SUS316				
本体材质 Body material	不锈钢Stainless steel SUS316				
杯子材质 Cup material	不锈钢Stainless steel SUS316				

■ 外型尺寸Dimension

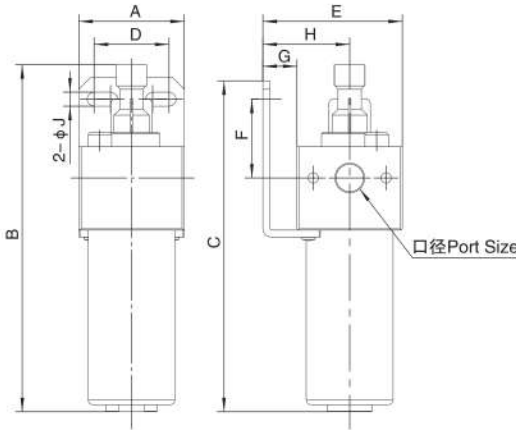

型号Model	口径Port Size	A	B	C	D	E	F	G	H	2-ØJ
YL-200	G1/4	45	148	141.1	32	59.5	33.6	14.5	37	6
YL-400	G3/8,G1/2	58	182.6	181.5	36	71	45	13	42	9
YL-600	G3/4,G1	75	209.3	222.3	50	82.5	67	7.5	45	9