


■ 欧洲标准气缸European Standard Cylinder

C85系列C85 Series



■ 订货型号OrderCode

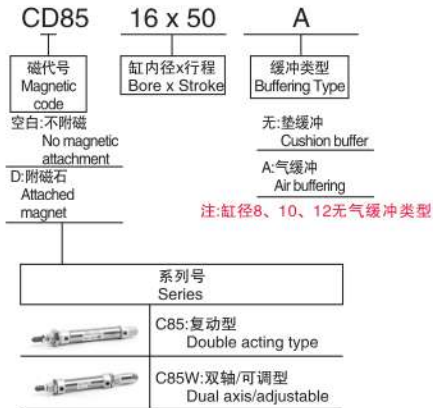

■ 技术参数Technical Specification

缸径(mm) Bore Size	8	10	12	16	20	25
动作型式Acting Mode	复动型Double acting					
工作介质Working Media	空气(经40 μ m过滤的洁净空气)CleanedAir					
使用压力Working Pressure	0.1~0.9Mpa(1~9kgf/cm ²)					
保证耐压力Proof Pressure	1.35Mpa(13.5kgf/cm ²)					
使用温度Working Temperature	-5~70C					
缓冲型式Buffering Mode	垫缓冲/气缓冲Rubber Cushion/ Air Buffering					
接管口径Port Size	M5					1/8 "
本体材质Body Material	不锈钢Stainless Steel					

■ 气缸行程Stroke Of Cylinder



缸径 Bore Size (mm)	标准行程(mm) Standard Stroke(mm)												最大行程 Max.stroke (mm)	容许行程 Allowable stroke (mm)
8	10	25	40	50	80	100							150	200
10	10	25	40	50	80	100							150	200
12	10	25	40	50	80	100	125	150	175	200			300	500
16	10	25	40	50	80	100	125	150	175	200			300	500
20	10	25	40	50	80	100	125	150	175	200	250	300	500	1000
25	10	25	40	50	80	100	125	150	175	200	250	300	500	1000

■ 感应开关的选择Selection Of Sensor Switch



型式Mode	缸径Bore Size	8	10	12	16	20	25
感应开关Sensor Switch		CS1-F CS1-U CS1-S					

■ 外型尺寸Dimension

无内置磁环及有内置磁环
橡胶缓冲
No built-in magnetic ring
or with built-in magnetic ring



无内置磁环及有内置磁环
气缓冲
No built-in magnetic ring or with
built-in magnetic ring

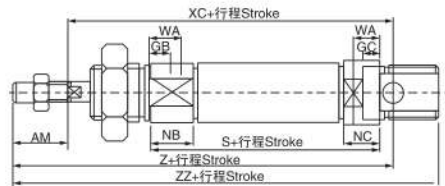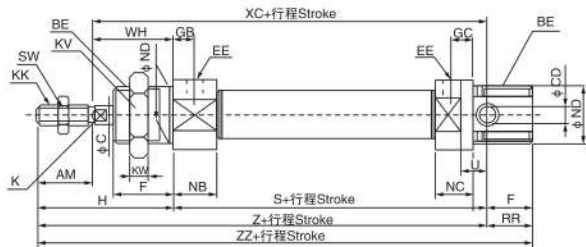

缸径 Bore Size (mm)	AM	BE	φ C	φ CD	φ D	EE	EW	F	GB	GC	WA	WB	H	HR	K	KK
8	12	M12X1.25	4	4	17	M5X0.8	8	12	7	5	-	-	28	10	-	M4X0.7
10	12	M12X1.25	4	4	17	M5X0.8	8	12	7	5	-	-	28	10.5	-	M4X0.7
12	16	M16X1.5	6	6	20	M5X0.8	12	17	8	6	-	-	38	14	5	M6X 1
16	16	M16X1.5	6	6	20	M5X0.8	12	17	8(5.5)	6(5.5)	9.5	6.5	38	14	5	M6X 1
20	20	M22X1.5	8	8	28	G1/8	16	20	8	8	11	9	44	17	6	M8X1.25
25	22	M22x1.5	10	8	33.5	G1/8	16	22	8	8	11	10	50	20	8	M10X1.25

缸径 Bore Size (mm)	KV	KW	NB	NC	NA	φ ND	RR	S	SW	U	WH	XC	Z	ZZ
8	17	7	11.5	9.5	15	12	10	46	7	6	16	64	76	86
10	17	7	11.5	9.5	15	12	10	46	7	6	16	64	76	86
12	22	6	12.5	10.5	18	16	14	50	10	9	22	75	91	105
16	22	6	12.5(12.5)	10.5(12.5)	18	16	13	56	10	9	22	82	98	111
20	30	7	15	15	24	22	11	62	14	12	24	95	115	126
25	30	7	15	15	30	22	11	65	17	12	28	104	126	137

():括弧内是气缓冲尺寸